


INTERLOCKING FLAT TILE FLASHING

KFT

16-50mm

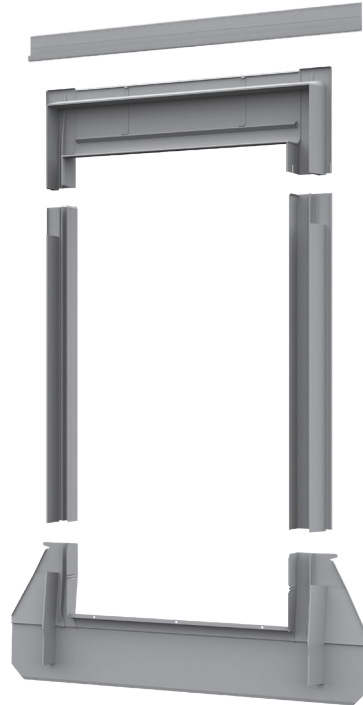

APPLICABLE

- In roof pitch range of 15-90°
- Interlocking flat tiles height 16-50 mm
















FEATURES


- Perfect watertightness
- Easy installation
- Weather and UV ray resistant
- Lead free
- Foam tiling gasket
- Flat bottom part to ensure a perfect seal to interlocking flat tile
- Free of charge drainage gutter

MATERIAL

- Aluminium
- Powder coated grey, RAL7043

AVAILABLE SIZES [cm]

														
C2A	C4A	C6A	F4A	F6A	M4A	M6A	M8A	M10A	P6A	P8A	S6A	S8A	U4A	U8A
55x78	55x98	55x118	66x98	66x118	78x98	78x118	78x140	78x160	94x118	94x140	114x118	114x140	134x98	134x140



www.dakea.com

